

Zetor

M Series Product Guide

22 HP to 80 HP



Tractor is Zetor. Since 1946.

Fetor

SUB-COMPACT



MODEL	M22HT SERIES (4 CONFIGURATIONS)	M25HT SERIES (4 CONFIGURATIONS)
3 - Cylinder Yanmar T4F Engine	22 HP	25.3 HP
PTO HP	17.6 HP	20 HP
PTO Engagement	Independent, Electro-Hydraulic Engagement	
PTO Speeds	540 Rear / 2500 Mid	540 Rear / 2000 Mid
Transmission	2-Range Hydrostat, Dual Foot Pedal Control	
3-Point Hitch	CAT 1 / Position Control	
3-Point Hitch Lift Capacity	1,100 Lbs.	1,323 Lbs.
Hydraulic GPM	6.97	6.95 / 1-Rear Valve
Weight w/Loader	2,055 Lbs.	2,400 Lbs.

MODEL	M22 SERIES	M25 SERIES
Mid-Mount Mower	ZM54 inch	ZM60 inch
Front End Loader	ZL 22-QA 48	ZL 25-QA 54
Maximum LiftHeight	71.3 inch	75.3 inch
Maximum LiftCapacity	617 Lbs.	772 Lbs.
Backhoe with Subframe	ZB 70	ZB 80
Digging Depth	77 inch	78 inch



Zetor



MODEL	M40SS	M40HT / M40HTC	M50SS	M60SS	M60HTC
EngineHP/PTOHP	38 / 31.8	38 / 29.9	47.6 / 40.5	56 / 47.6	56 / 45
Platform	Folding ROPS	FoldingROPS/CAB	Folding ROPS		CAB
PTO & Engagement	Independent 540 Rear / Electro-Hydraulic Engagement / Multi-Wet Clutch Pack				
Transmission	12/12 Shuttle	3-Range HST	16/16 Shuttle with Creeper		3-Range HST, Cruise
Hydraulic GPM	11.2GPM/2-RearValves/2-Mid Valves/FactoryJoystick		14.5 GPM / 2-Rear Valves (Opt 3) 2-Mid Valves / Factory Joystick		
CAT 1, 3-Point Hitch	Telescopic Stabilizers/Extendable LinkEnds Drawbar		TelescopicStabilizers/FlexibleLinkEnds/Swinging Drawbar		
3-Point Hitch Lift	2,646 Lbs. Lift Capacity		3,314 Lbs. Lift Capacity		
Front End Loader	ZL40 with QA60” Bucket Skid-Steer Attaching System		ZL60 with QA72” Bucket Skid-Steer Attaching System		
LoaderLift Height	101.4 inch		109.1 inch		
Loader Lift Capacity	2,235 Lbs. to Full Height		2,478 Lbs. to Full Height		
Weight w/Loader	4,430 Lbs.	4,480 Lbs. / 4,780 Lbs.	5,250 Lbs.	5,400 Lbs.	5,700 Lbs.

**Weights, Front Fenders, Front 3-Point Hitch, Pallet Forks, Optional*



Zetor



MODEL	M70PSC	M85PSC HD L	M85 SSC
Engine Gross / Net	DEUTZ T4F, No Def: 72.8 HP / 67 HP	DEUTZ T4F, No Def: 80 HP / 74 HP	DEUTZ T4F, No Def: 80 HP / 74 HP
PTO HP	62 HP	64 HP	66.5 HP
Platform	Premium Climate Control CAB		Deluxe Climate Control CAB
Operator Seat	Premium Cloth, Mech-Suspension	Premium Cloth, Mech-Sus- pension, Recline, Swivel, Dual Armrest	Deluxe Cloth, Mech-Suspension
Instructor Seat	N/A	Premium Folding Standard	Fixed Standard
PTO Engagement	Independent, Electro-Hydraulic Engagement		Independent, Mechanical
PTO Speeds	540 / 540E / 1000 Rear	540 / 1000 Rear	
Transmission	24/24 Power Shuttle, Creeper	24/12PowerShuttle/PowershiftPowerClutch™, Creeper	12/12 Synchro-Shuttle
Hydraulic GPM	16.1, 2-Remotes (3-Opt) Factory Joystick, 2-MidValves, Opt 3rd Function	20.0 GPM, 2-RearValves (3-Opt) Opt Factory Joystick	
3-Point Hitch	CAT 2 / 1: Position / Mix / Draft / Mechanical Control		
3-Point HitchLift	4,270 Lbs.	7,418 Lbs.	5,500 Lbs.
	HD Telescopic Stabilizers, HD Extendable Link Ends, HD Swinging Drawbar & Hammer Strap		
Front EndLoader	ZL65/75 (Optional 3rd Function)	ZL229-1 , 3rd Function Standard	
Loader LiftHeight	125 inch	134 inch	
Loader Lift Capacity	3,125 Lbs.	3,748 Lbs.	
Weight w/Loader	7,660 Lbs.	11,008 Lbs.	10,608 Lbs.

**Weights, Front Fenders, Front 3-Point Hitch, Pallet Forks, Air-Ride Seat, Optional*





ENGINE

YANMAR ENGINES

- Turbo-charged 4-cylinder T4F, No Def
- Natural aspirated 3 and 4-cylinder T4F, No Def
- Cast Iron Block, 16-Valves
- High Pressure Common Rail Fuel Injection System
- Filtration: Oil, Fuel, Air
- Water-cooled diesel engine
 - M22 SERIES – M50SSC
 - M25 SERIES – M60SSC
 - M40 SERIES – M60HTC



DEUTZ ENGINES

- Turbocharged, air-to-air cooling
- 4-cylinder T4F, DOC Catalyst, No DPF Filter, No Def
- Cast Iron Block, 16-Valves
- High Pressure Common Rail Fuel Injection System
- Filtration: Oil, Fuel, Air
- Water-cooled diesel engine
 - M70 PSC
 - M85PSC HD
 - M85PSC HDL
 - M85 SSC




TRANSMISSION

3-Range Cast Iron Transaxle with Hydrostatic Transmission
M40HT, M40HTC, M60HTC
M40HT & M40HTC, Opt Mid PTO

2-Range Cast Aluminum Transaxle with Hydrostatic Transmission, Rear and Mid PTO.
(M22HT & M25HT Series)

Zetor Cast Iron Transaxle with Inboard Planetary Final Drive, 540/1000
Independent PTO M85PSC HD and M85PSC HDL (540/540E/1000
M70PSC)
all 3-Models feature Multi-Wet Clutch Packs

M85SSC comes equipped with inboard Planetary Final Drive and dry
Ceramic Clutch with independent 540/1000 PTO

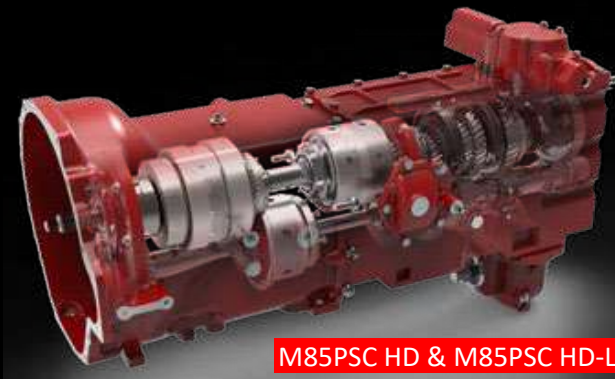

M85PSC HD & M85PSC HD-L

PREMIUM FEATURES

M40, M50, M60, M70 & M85 Series

- Premium 3-Point Hitch & HD Drawbar
- Telescopic Stabilizers & Flexible Link Ends
- 2-Rear Remotes (*Optional 3, M50 – M85*)
- 2-Mid Mount Valves & Factory Joystick (*M85 Series, Optional Joystick*)
- Position, Draft/Mix 3-Point Hitch Controls (*M40 Series, optional Draft*)
- HST models feature dual side-by-side pedals and dual turn brake pedals
- ROPS and CAB ISO Flat Platforms (*ROPS ISO Flat Platform Pictured*)





FOLLOW US



www.facebook.com/ZetorNorthAmerica

www.twitter.com/ZetorNA

www.instagram.com/zetorna

www.youtube.com/TraktoryZetor

www.ZetorNA.com

sales@zetorna.com

service@zetorna.com

ZETOR NORTH AMERICA

5784 Mining Terrace

Jacksonville, FL, USA 32257

PH: 904-647-7169

Fax: 904-647-9346

EVERY EFFORT HAS BEEN MADE TO ENSURE THAT THE INFORMATION CONTAINED IN THIS PUBLICATION IS ACCURATE AND CURRENT. HOWEVER, INACCURACIES, ERRORS OR OMISSIONS MAY OCCUR AND DETAILS OF THE SPECIFICATIONS MAY BE CHANGED AT ANY TIME WITHOUT NOTICE. THEREFORE, ALL SPECIFICATIONS SHOULD BE CONFIRMED WITH YOUR ZETOR DEALER OR THE MANUFACTURE BEFORE ANY PURCHASE. THE IMAGES/PHOTOS ARE FOR ILLUSTRATIVE PURPOSE AND MAY VARY FROM ACTUAL PRODUCTS. SUBJECT TO CHANGE. 01/2020